


Ceramic Heating Collar (RAB)

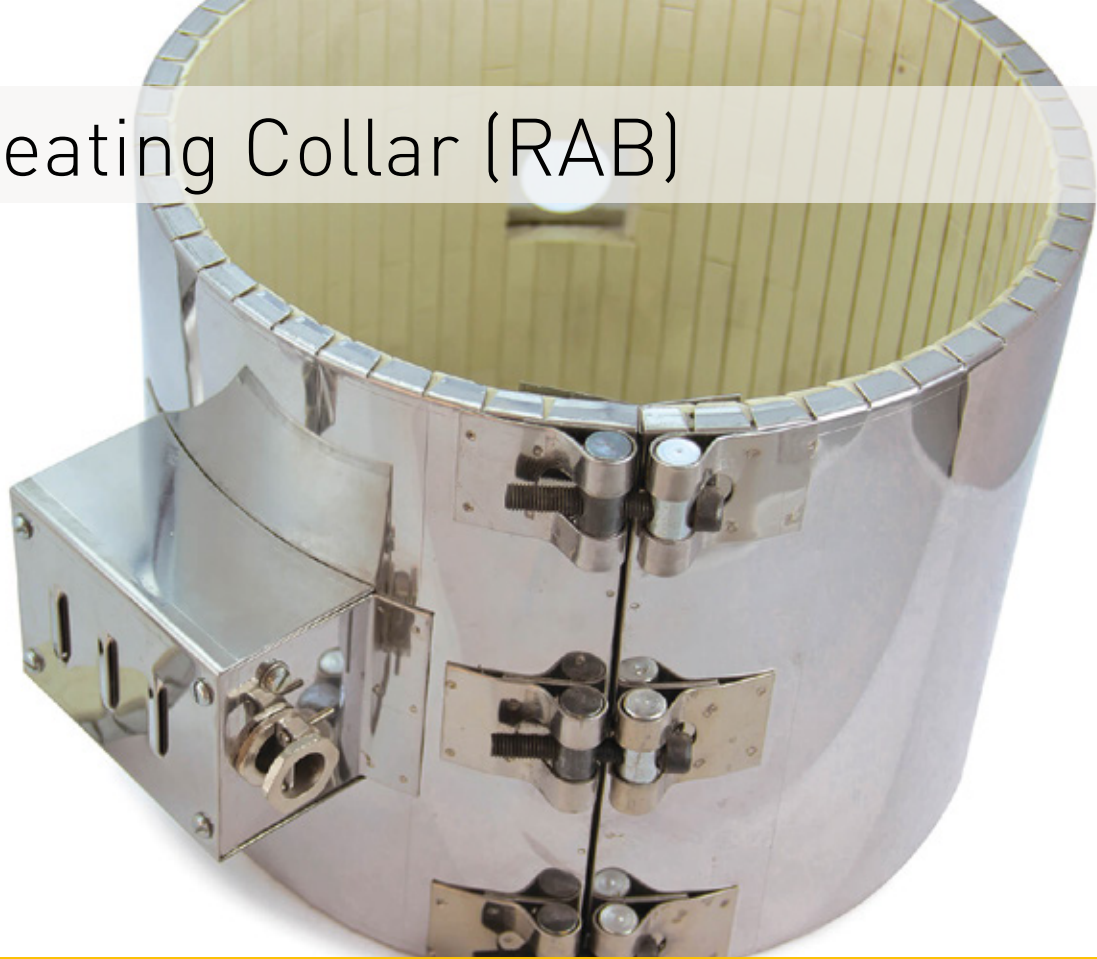

General Specifications

- Sheet: AISI-430.
- Heating Wire: NiCr
- Ceramics: Steatite.
- They can carry loads of up to 1 OW/cm2. Are used in places where a higher temperature is required and with the mica heaters can not be achieved.

Quality control

- Insulation: 5 MOhm at 500 V DC Cold (minimum).
- Dielectric strength: 1500 V 1 second.
- Nominal Power: + 5% - 10%